
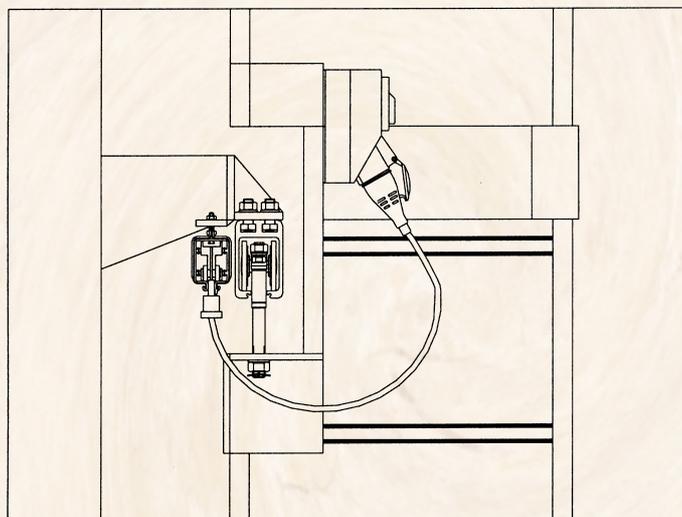


Normally the power for the trolleys and suspended platforms are supplied from power outputs in the facade or on the roof.

To avoid using cables for this power supply it is possible to install power tracks which are connected to the trolley through special collectors. The power track must be installed parallel to the ordinary aluminium track.

The power track system will follow the carrier track through curves and bends. It is therefore possible to use the power track together with all NorAcon track types.

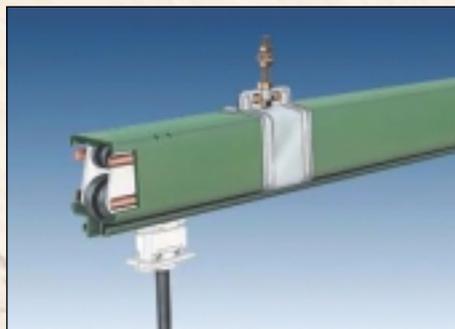

*Example installation NP04 and power rail.*



**NORACON AS**

Sofiemyrveien 6 • N-1412 Sofiemyr • Norway

Tel. 0047 66 99 56 50 • Fax. 0047 66 99 56 51 • E-mail: [noracn@noracn.com](mailto:noracn@noracn.com) • [www.noracn.com](http://www.noracn.com)

